

10-27 00

A  
Box Seg



EXPRESS MAIL LABEL NO. **EK 803 350 594 US**

Date of Deposit: **October 26, 2000**

I hereby certify that this is being deposited with the United States Postal Service "Express Mail, Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box PATENT APPLICATION, Asst. Commissioner for Patents, Washington, D.C. 20231.

By:

Elmer Galbi, Reg. No. 19,761  
13314 Vermeer Drive  
Lake Oswego, OR, 97035  
Telephone 503-697-78444



Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

**Transmitted herewith for filing is the following new patent application:**

Inventors: **Michael C. Park** whose address is **700 SW Vermont Ct. #102, Portland, OR 97223**

**Scott Wilson** whose address is **11060 SW Tonquin Rd., Sherwood, OR 97140**

Title: **SYSTEM AND METHOD FOR CAMERA CALIBRATION**

Attorney Docket Reference: **EWG-123 US**

Enclosed for filing are:

- 1) A specification of the invention including eleven (11) sheets of informal drawings and a CD (compact disk) appendix.

It is noted that the Patent Office web site states:

**"37 CFR § 1.96, CD submissions have become optional now due to USPTO policy"**

- 2) A small entity form.
- 3) A signed Assignment of the invention including a cover sheet
- 4) A signed Declaration by the Inventors
- 5) A return addressed postcard for filing notification
- 6) A Power of Attorney
- 7) A check for **\$515.00** (iMove-# 1272) to cover the filing fee:

**Please charge any deficiency in the enclosed fee (or credit any overpayment) to Deposit account 500,433 which is in the name of Elmer Galbi.**

**Please direct all correspondence to:**

**Elmer Galbi, Esq.  
13314 Vermeer Drive  
Lake Oswego, OR 97035  
Phone 503-697-7844**

Respectfully submitted,

Elmer W. Galbi, Reg. No. 19,761  
13314 Vermeer Drive  
Lake Oswego, OR 97035

# CLAIM OF SMALL ENTITY STATUS

## VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) and 1.27(c) - SMALL BUSINESS CONCERN

I hereby declare that I am an official empowered to act on behalf of the small business concern identified below:

NAME OF CONCERN: IMOVE INCORPORATED

ADDRESS OF CONCERN: 33 N.W. First Avenue, Suite 1,  
Portland, OR 97209

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third-party or parties controls or has the power to control both.

I hereby declare that the rights under contract or law have been conveyed, to and remain with the small business concern identified above with regard to the invention:

Entitled: SYSTEM AND METHOD FOR CAMERA CALIBRATION

By inventors: Michael C. Park and Scott Wilson

Docket: EWG-123 US

described in the specification filed herewith.

No rights to the invention are held by any person who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small business entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: G. David Ripley

TITLE OF PERSON SIGNING : Chief Technology Officer

SIGNATURE G. David Ripley

DATE: 10/23/00

## System and Method for Camera Calibration

### **Appendix on a CD:**

Attached to this application is a CD (i.e. a compact disk) that includes text files (that is, an  
5 octal dump) of the programs listed below plus several text files.

- a) A calibration program used to determine the parameters needed to seam images.
- b) A seaming program which will seam images using the parameters determined by the calibration program.
- c) Text files with a copyright notice, operating instructions and an example of camera  
10 calibration parameters.

### **Field of the Invention:**

The present invention relates to cameras and more particularly to a system and method  
15 for determining the characteristics of cameras.

### **Background of the Invention:**

Panoramic images can be created by seaming together multiple single view images. Multi  
lens cameras are available which can simultaneously capture multiple single view images.  
The images captured by such a camera can be subsequently seamed into a panoramic  
20 image. Patent application serial number 09/602,290 filed 6/23/00 describes an interactive  
seamer for creating panoramic images. Patent application serial number 09/338,790 filed  
6/23/99 describes a multi-lens cameras. The disclosure in the referenced patent  
application is hereby incorporated herein by reference.

25 It is practically impossible to obtain a set of single view images that fit together perfectly  
into a panorama. Parameters such as the heading, pitch, bank, offset, brightness and  
contrast of each image must be adjusted in order to make the images fit together into a  
panorama. One of the reasons that the parameters of the individual images must be  
adjusted is that the individual camera elements in the cameras that recorded the images  
30 have their own peculiarities and idiosyncrasies. In general each individual camera and  
each individual camera lens has parameters and idiosyncrasies that are peculiar and  
particular to that lens alone

If one determines the adjustments that will make to one set of images (recorded by a particular camera) fit together to form a panorama, these adjustments will in general provide an acceptable modification for a different set of images from the same camera so that the second set of images will fit together into a panorama.

5

### **Summary of the invention:**

The present invention provides a system and method for determining the adjustments that must be made to the individual images recorded by a multi-lens camera so that the images will fit together into a panorama. With the present invention the camera is placed  
10 in the center of a structure, the edges of which have at least one row on indicia. Each camera records an image which includes the indicia along each edge that will be seamed with an edge of another image in order to form a panorama. Each edge of the structure which is along a seam that will be seamed with an edge of another image is recorded by two lenses on the camera. The amount of adjustment required to make the indicia in the  
15 two images fit together is then determined. The values of these adjustments are recorded along with an identification of the camera which recorded the images. Subsequent sets of images recorded by this same camera can then be seamed using the same adjustments.

Another feature of the present invention includes providing two rows of indicia along the  
20 edges of the cube. The two rows of indicia are spaced apart by an amount equal to the distance between the lenses on the camera. This eliminates the need to correct for parallax and eliminates the need to position the camera at the exact center of the cube. Another feature of this invention is that the shape of the indicia is distorted so that when the indicia are recorded through a fisheye lens, the dots appear un-distorted, thereby  
25 facilitating exact alignment of the images.

### **Brief Description of the Drawings:**

Figure 1 is an overall process flow diagram.

Figure 2A is an overall diagram of the calibration cube.

30 Figure 2B is a more detailed view of a portion of the calibration cube.

Figure 2C is an illustration showing why the rows of dots are spaced apart.

Figure 3A shows an image recorded through a single lens on the camera.

Figure 3B shows two images displayed side by side, so that corresponding dots can be identified.

Figure 3C shows a blank unit sphere and the default parameters used to initially seam images into a panorama.

5 Figure 4 shows multiple images seamed together using default parameters and the rows of dots do not coincide.

Figure 5 illustrates the distortion to dots caused by a lens.

Figure 6 is a flow diagram showing the operation of the program.

Figure 7 is a flow diagram of an alternate embodiment of the invention.

10

### **Detailed Description:**

An overall flow diagram of the process performed by a preferred embodiment of the invention is shown in Figure 1. The calibration structure used is shown in Figures 2A and 2B. The calibration structure 200 is cube shaped. First, as indicated by block 101 a  
15 particular camera 213 is used to capture images of the edges of the calibration cube 200. The images so captured can be termed calibration images.

The camera is a multi-lens camera with one lens pointing toward each side of the cube 200. A detailed description of camera 213 is given in co-pending application serial  
20 number 09/338,790 filed 06/23/99 entitled "System for Digitally Capturing and Recording Panoramic Movies" the specification of which is hereby incorporated herein by reference. The camera 213 has six lenses and six images, one of each side of cube 200, are simultaneously recorded. Two lenses of camera 213 capture an image of each edge of the cube 200.

25

Figure 3A shows an example of an image 331 captured by one lens of camera 213. At the edge of image 331 (and at the edge of each image captured by camera 213) there are two rows of dots corresponding to the dots along one edge of cube 200. Since two lenses capture each edge of the cube 200, for each edge of cube 200, there are two images that  
30 show the same row of dots.

After the images have been recorded, the operator manually indicates to the program (as indicated by block 102) which dots in the various images correspond to each other.

During this step, the two images which show the same edge of the cube are displayed adjacent to each other as shown in Figure 3B. The operator manually identified to the program which dots correspond in the two images. The operator does this by first clicking (with a mouse) on a "start" button and by then "clicking" on the two corresponding dots in sequence. The program recognizes the sequential "clicks" as indicating that the dots correspond.

Next as indicated by block 104, the operator finds the settings of various parameters needed in order to align the images so that they can be seamed into a panorama without artifacts. The correction factors found are recorded along with an identification of the camera that created recorded the images. In the first preferred embodiment, the parameters of the camera that are determined for each of the six camera lenses are:

- a) camera aiming which includes heading pitch and bank,
- b) field of view,
- c) offset of the camera lens to the CCD,
- d) amount of pin cushion distortion in the camera lens,
- e) amount of pitch, roll, heading and offset.

In the following discussion, when reference is made to camera parameters, it is the above parameters that are being discussed. It is however, noted that the invention could be extended to other camera parameters (or some could be eliminated) as necessary for particular applications.

A camera that went through the above process can then be used to record some other set of images and the parameters determined as described above can be used to seam this new set of images. That is, the final step 105 shown in Figure 1 is performed on a new set of images which were recorded with a previously calibrated camera. At this point the previously determined correction factors are applied to the new set of images.

Figure 2A is an overall diagram of the calibration cube 200 showing the twelve edge panels designated 201 to 212. A camera 213 is positioned approximately at the center of the cube. All twelve panels 201 to 212 are identical and thus only panel 202 will be discussed in detail. Figure 2B shows panel 202 and the panels connected to it in more detail. Panel 202 has two rows of dots designated 202A and 202B positioned on the

panel. The panels are positioned at a 45 degree angle relative to the sides of the cube. If a line were drawn from the center of each panel (for example from point 202C) perpendicular to the surface of the panel the line would go to the center of camera 213.

5 When activated, camera 213 records an image of each side of the cube 200. Each image so recorded includes the four panels surrounding the sides of the cube which is recorded. An example of such an image is shown in Figure 3A. It is important to note that each edge panel is recorded by two lenses from camera 213. Thus, each edge of the cube appears on two images.

10

The distance between the two rows of dots on each panel matches the distance between the lenses on camera 213. This is done in order to eliminate the need for any adjustment due to parallax. The reason for this is illustrated in Figure 2C which illustrates two lenses 213A and 213B on camera 213 and the two dots on panel 202A and 202B on panel 202.

15

Since the dots are spaced the same distance apart as the lenses which recorded the dots, there is no need for a parallax adjustment to take into account the distance of the camera 213 from the panel 202. Naturally the program that matches images taken by the two lenses must take into account that the two rows of dots are separated by a certain amount of distance.

20

Figure 3B illustrates how the operator identifies to the program which dots in adjacent images correspond. The images illustrated in Figure 3B are an example of the images used in the operation indicated by block 102 in Figure 2. As illustrated in Figure 3B, the program displays two images 331 and 332 side by side so that the operator can see at least a portion of both rows of dots in both images. For example Figure 3B shows the image taken by lens 213A next to the image taken by lens 213B. The rows of dots on panel 202 appear in both images. The program includes shape recognition logic that locates and records in a table the position of each dot.

25

30 An example of the main elements of such a table are given in Table One below.

Image I D #	Dot ID #	X position	Y position	Cor-Dot ID
IM0097	D301	456	237	D302
IM0098	D302	159	857	D301

**TABLE ONE**

In the above table, each row pertains to a particular dot. The columns in the table give the following information:

- Image ID #     A unique number that identifies a particular image
- Dot ID #        A unique number that identifies a particular dot
- x Position      The x position of the particular dot
- y Position      The y position of the particular dot
- Cor-Dot ID     The Dot ID number of a corresponding dot on a different image.  
The information in this column is entered after the operator  
identified to the program which dots in the two images correspond.

When as illustrated in Figure 3B, the images are displayed next to each other an operator can easily visually identify the corresponding dots. For example dot 301 corresponds to dot 302. After clicking on a "start" button to initiate the operation, the operator first "clicks" on dot 301 and then the operator clicks on dot 302. This tells the program that these two dots correspond and the program records in the last column of the above table the fact that these two dots correspond. The operator sequentially does this for each dot along edge 202P. The process is repeated for each of the twelve edges of the cube 200.

It is noted that each images does not need to contain a complete image of both rows of dots. For example, the bottom of image 331 shown in Figure 3A and 3B does not contain a complete image of both rows of dots. The two adjacent dots (for example dots 271 and 272 in Figure 2B) can be considered as constituting a hypothetical bar or area that begins at one dot and ends at the other dot. When the operator sequentially clicks on dots 301 and 302 (see Figure 3B), the operator is identifying to the program the two "hypothetical bars" or area contain corresponding dots in the two images. Since each image shows at least the inside row of dots on each panel, and the distance between the rows of dots is



known to the program, the program can determine the location of all dots, even if they are not explicitly shown in the image.

Next the program seams the images into a panorama using a set of default parameters.

- 5 When the program is initiated it brings up the window shown in Figure 3C. The window shows a panorama with no images loaded. On the right side of the screen are various adjustments that can be made to images which are to be seamed into a panorama. These parameters are initially set to a set of default parameters such as shown below. The six cameras are identified as the Top, Front Bottom Back Left and Right cameras.
- 10 The Field of View (FOV), Heading, Pitch, Bank, x Offset and y Offset for the cameras are initially set to the values shown in the following table. It should be understood that the following initial values are only examples and the values for various types of cameras can be determined by experimenting to find which give the best results.

15

Camera	FOV	Heading	Pitch	Bank	x offset	y Offset
Top	95	180	90	0	0	0
Front	95	0	0	0	0	0
Bottom	95	0	-90	0	0	0
Back	95	180	0	0	0	0
Left	95	-90	0	0	0	0
Right	95	90	0	0	0	0

Table Two

- Provision is also made for other parameters that can be used if desired. For example the amount of Fisheye adjustment on pin cushion adjustment can be set.
- 20

- The images as seamed using the default parameters are shown to the operator as shown in Figure 3C. As shown in Figure 4, the images have been seamed, but the dots on the various images do not correspond. For example, dot 304D from image 304 should coincide with dot 305D from image 305. However, the default parameters which produced the panorama shown in Figure 4 did not seam the images as they should be and hence
- 25

the dot 304D and dot 305D do not coincide. The operator can then change the various parameters used during the seaming operation in order to make the dots coincide. This is similar to the manual operation described in co-pending application serial number 09/602,290 filed 6/23/2000 (the specification and drawings of which are hereby  
5 incorporated herein by reference).

Figure 6 is a program flow diagram showing in detail how the program performs the operations indicated by blocks 102, 104 and 105 in Figure 1. That is, Figure 6 is a flow diagram showing how the corresponding dots on a set of images are identified, the  
10 appropriate correction factors are determined to make the dots coincide (i.e. the appropriate correction factors are determined in order to properly seam the images and finally how these parameters are used to seam another set of images recorded by the same camera.

15 First as indicated by block 601, the six bitmaps (i.e. the six images) recorded by a particular camera 213 are loaded into the program. These images show the edges of calibration cube 200. Each edge appears in two of the images. Next as indicated by block 602 a conventional shape recognition routine is used to identify the location of the center of the dots at the periphery of each image.

20 The operator next identifies corresponding dots to the program as indicated by block 603. The operator can for example visually determine that dots 301 and 302 shown in Figure 3B are in fact the same dot on the frame edge and that these dots should coincide. The operator uses a mouse to click in sequence on the corresponding dots. The program  
25 recognizes the clicks as indicating that the two dots on which the operator has clicked correspond. The identity of the corresponding dots are then recorded in a table such as the previously give Table One. Corresponding dots are termed alignment points.

30 Next as indicated by block 605, the alignment points are mapped onto a sphere of unit radius. The mapping is done using a default set of parameters for camera direction, field of view, lens distortion, etc. The heading and pitch of each alignment point on the sphere is determined. Zero pitch and zero heading is taken as perpendicular to the center of each image.

The next series of steps 606A to 606D is at the heart of the calibration process. A least squares fitting process is used to change the various parameters so that the corresponding dots in the images coincide with each other. First as indicated by block

5 606A a vector is established going between each pair of corresponding points. For example a vector going between 301 and 302 in Figure 3B is calculated. A similar vector is calculated for each pair of points. The length of the vector represents the amount of error in the alignment of the points.

10 Next as indicated by block 606B, the amount of change in each vector which results from a small change in each lens parameter is determined. That is, each of the lens parameters such as heading, field of view etc. is changed by a small increment and the resulting change in the length of the vectors is determined. The lens parameters are changed one at a time and the resulting change in each vector is determined.

15 A conventional least squares fit for the error vectors is calculated to determine the changes in the camera parameters that reduce the error vectors to the smallest values. This is indicated by block 606C. Next the changes are applied to the parameters as indicated by block 606D. If the effect of changes in camera parameters on the error  
20 vectors was linear, it would only be necessary to go through steps 606A to 606D one time. However, the effect on the error vectors of changing the camera parameters is not linear, hence, steps 606A to 606D are re executed three times as indicated by block 607. Each time steps 606A to 606D are executed the result converges closer to the optimum values. Naturally it will be understood by those skilled in the art that the selection of three  
25 times is arbitrary and based on experience and that a number is selected that produces a result of sufficient accuracy.

After the process in blocks 606A to 606D has been repeated three times, the resulting panorama is displayed to the operator to insure that the process has been successful. If  
30 the panorama displayed is not satisfactory the operations are repeated. If the resulting panorama is acceptable, the operator saves the values of the parameters which generated the satisfactory panorama.

It has been found that if the program is given the freedom to change all the camera parameters, the result can be a relatively large change in the field of view from one particular camera to another particular camera. While this does get the image into alignment, it adds a certain amount of size distortion to the image. This potential problem can be avoided by giving the operator the ability to lockout (not use) some of the camera offsets during the least squares fit operation. Alternate embodiments provide a mechanism whereby the program automatically determines which offsets to lock during the least squares fit operation.

Another feature of this invention is that the dots on the edges of the cube 200 are not in fact round. It is known that when a circle is viewed through a fisheye lens the image of the circle will not be round. The distortion produced by a fisheye lens can be understood by examining Figure 5. Figure 5 shows a array of dots that has been distorted so that when viewed through a fisheye lens these dots will appear as a square array. The amount of distortion theoretically produced by a fisheye lens is know in the art. Each dot shown in Figure 5 has a shape such that when the dot is viewed through a fisheye lens, the dot appears round. This same type of distortion is provided for the dots on panels 201 to 212. That is, each dot on the panels 201 to 212 has a shape so that when the dot is viewed through a fisheye lens, the dot appears as a round dot. . This facilitates the recognition and location of the dots by the program. It is noted that in Figure 5, the rows of dots are not straight, that is, the rows are concave. The shape of the individual dots on panels 201 to 212 is distorted as described above; however, the rows of dots are straight. Since the rows of dots on panels 201 to 212 are straight, the rows of dots in the images such as shown in Figure 3A are convex due to the action of the fisheye lens. Naturally, if the system used a lens type other than fisheye, the dots would have a distortion corresponding to the distortion produced by the particular type of lens used.

In an alternate embodiment of the invention, a program is provided which automatically identifies the corresponding dots in adjacent images. this eliminates the need for the operator to identify corresponding dots to the program operator.

It is noted that the calibration structure used by the preferred embodiment is in the shape of a cube. The reason for this is that the camera 213 is in the shape of a cube. That is, the lenses on camera 213 are positioned on the sides of a cube. If the lenses were positioned differently, the structure would have a different shape. The term "edge which will be seamed" is used to mean an edge of an image which will be seamed with the edge of another image to create a panorama. The structure must have a shape so that (a) each edge which will be seamed is captured by two lenses, and (b) the image captured by each camera includes at least one row of dots along each edge which will be seamed. In the preferred embodiment, each edge panel 201 to 212 is captured by two lenses, and the image captured by each lens contains at least one row of dots along each edge.

If the lenses of a camera are positioned in a configuration which differs from the positions of the lenses on camera 213, the calibration structure would have a different shape. The important point is that the calibration structure would have a shape such that (a) each edge which will be seamed is captured by two lenses, and (b) the image captured by each camera includes at least one row of dots along each edge which will be seamed. Many alternatives could be found which meet the above criteria. As a simple example, if the camera was a cube with two lenses on the top side of the cube, each of which captured 45 degrees, the calibration structure would be a cube with a panel at the middle of the top of the cube.

It is noted that in the preferred embodiment the indicia along the edges of the cube are in the shape of dots which appear as round areas on the captured images (after they have been distorted by a fisheye lens). Alternatively, indicia with other shapes could be used. For example, the indicia on the panels 201 to 212 could be in the shape of bars. These bars could be pre-distorted so that they appear rectangular after being distorted by a fisheye lens. The pre-distortion is only needed to make the recognition logic in the program simpler; however, it is not required for the operation of the invention. A wide variety of indicia shapes could be used as alternatives to the shape used in the preferred embodiment.

The identification of the camera that recorded a particular set of images can be manually recorded and then this identification can be applied to a set of camera parameters determined as described above. In an alternate embodiment described with reference to

Figure 7, the multi lens camera automatically records on each image an identification as described in co-pending application serial number 60/218,604 filed 7/17/2000 (the specification and drawings of which is hereby incorporated herein by reference). It is noted that the images recorded by the cameras described herein are digital in nature.

- 5 Hence the images recorded at one time can be stored in a file. The camera identification is placed in a header in this file.

In this embodiment, the calibration program reads this camera identification from the file header of the file that contains the images. The calibration program then records the  
10 camera identification along with the calibration parameters for that particular camera. The result is a table showing camera identification numbers and corresponding calibration parameters. When a set of images is read by the seaming program, it automatically reads the camera identification from the file header of the file that contains the images. The process is shown in Figure 7. First, as indicated by block 761, a camera records an  
15 image of the calibration cube as described above. The single view images generated are recorded along with the camera identification as described in the above referenced patent application. Next as indicated by block 762. The camera calibration parameters are determined as described above.

20 As indicated by block 765, a table is produced showing camera calibration parameters and camera identification. At a later time another set of images is recorded with this same camera as indicated by block 766. The camera identification is recorded along with the images. Finally, as indicated by block 767, when the images are sent to a seaming program, the camera identification is reads the camera identification along with the image  
25 data. The seaming program interrogates the table to find the correct parameters to use to seams the images using the appropriate parameters.

This application includes an appendix submitted on a CD (i.e. a compact disk). The CD includes the text files (i.e. octal dumps) of executable programs and other text files as  
30 listed below:

- a) A calibration program used to determine the parameters needed to seam images.
- b) A seaming program which will seam images using the parameters determined by the calibration program.

c) Text files with a copyright notice, operating instructions and an example of camera calibration parameters.

While the invention has been shown and described with respect to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail can be made without departing from the spirit and scope of the invention. Many different embodiments of the applicant's invention are possible and the invention is not limited to only the embodiment described herein. Applicant's invention is limited only by the scope of the appended claims and equivalents thereof.

10

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

**I claim:**

1) A system for calibrating a multi-lens camera comprising,  
a structure which has indicia along at least some of its edges and which is shaped so that  
(a) each edge of the structure which will be seamed is captured by two lenses, and (b) the  
5 image captured by each camera lens includes at least one row of indicia along each edge  
which will be seamed,  
whereby when said multi-lens camera which is positioned in the center of said structure  
records images, a particular edge of said structure is recorded by two cameras, and said  
cameras can be calibrated by determining the parameters needed to make the indicia on  
10 said particular edge coincide.

2) A system for calibrating a multi-lens camera comprising,  
15 a cube shaped structure with visible indicia along the edges of the cube,  
whereby when said multi-lens camera positioned in the center of said cube records  
images, a particular edge of said cube is recorded by two cameras, and said cameras can  
be calibrated by determining the parameters needed to make the dots on said particular  
edge coincide.

3) The system recited in claim 2 where the edges of said cube have two rows of dots  
spaced apart an amount equal to the distance between the lenses of said camera.

4) The system recited in claim 2 wherein the shape of said dots is such that when viewed  
25 through a fisheye lens they appear round.

5) A method of calibrating a multi-lens camera comprising the steps of,  
recording overlapping images of a test pattern, said test pattern including identifiable  
30 indicia along the edge thereof,  
determining the parameters required to seam said images into a panorama such that said  
indicia coincide, whereby said parameters form calibration parameters for said camera.



6) The method recited in claim 5 wherein said test pattern comprises the edges of a cube, said cube having indicia along the edges thereof.

7) The system recited in claim 1 where the edges of said structure have two rows of dots spaced apart an amount equal to the distance between the lenses of said camera.

8) The system recited in claim 1 wherein the shape of said indicia is such that when viewed through a fisheye lens they appear round.

9) The system recited in claim 7 wherein the shape of said dots is such that when viewed through a fisheye lens they appear round.

10) The structure recited in claim 1 wherein said structure has two rows of dots along each edge, said dots being separated by an amount equal to the distance between the lenses on said camera, whereby said images need not be corrected for parallax.

11) A method of calibrating a camera comprising the steps of:  
placing said camera in a calibration structure and recording a series of images,  
determining the parameters required by a seaming program in order to seam the images  
from said camera into a panorama,  
recording said calibration parameters along with an identification of the camera that  
produced the images.

12) A method of recording a particular set of images and producing a panorama from said particular set of images with a particular multi-lens camera comprising,  
recording with said camera a set of calibration images of a calibration structure,  
an identification of said camera being recorded along with said calibration images,  
determining the parameters required to seam said set of calibration images into a panorama,  
recording said parameters along with an identification of said camera,  
capturing said particular set of images with said particular camera and recording said images along with an identification of said camera,  
seaming said particular set of images into a panorama using said parameters.



**Abstract:**

A system and method for determining the adjustments that must be made to the individual images recorded by a multi-lens camera so that the images will fit together into a panorama. The camera is placed in the center of a structure, the edges of which have at

- 5 least one row on indicia. Each camera records an image which includes the indicia along each edge that will be seamed with an edge of another image in order to form a panorama. Each edge of the structure which is along a seam that will be seamed with an edge of another image is recorded by two lenses on the camera. The amount of adjustment required to make the indicia in the two images fit together is then determined.
- 10 The values of these adjustments are recorded along with an identification of the camera which recorded the images. Subsequent sets of images recorded by this same camera can then be seamed using the same adjustments.

15

Figure 1


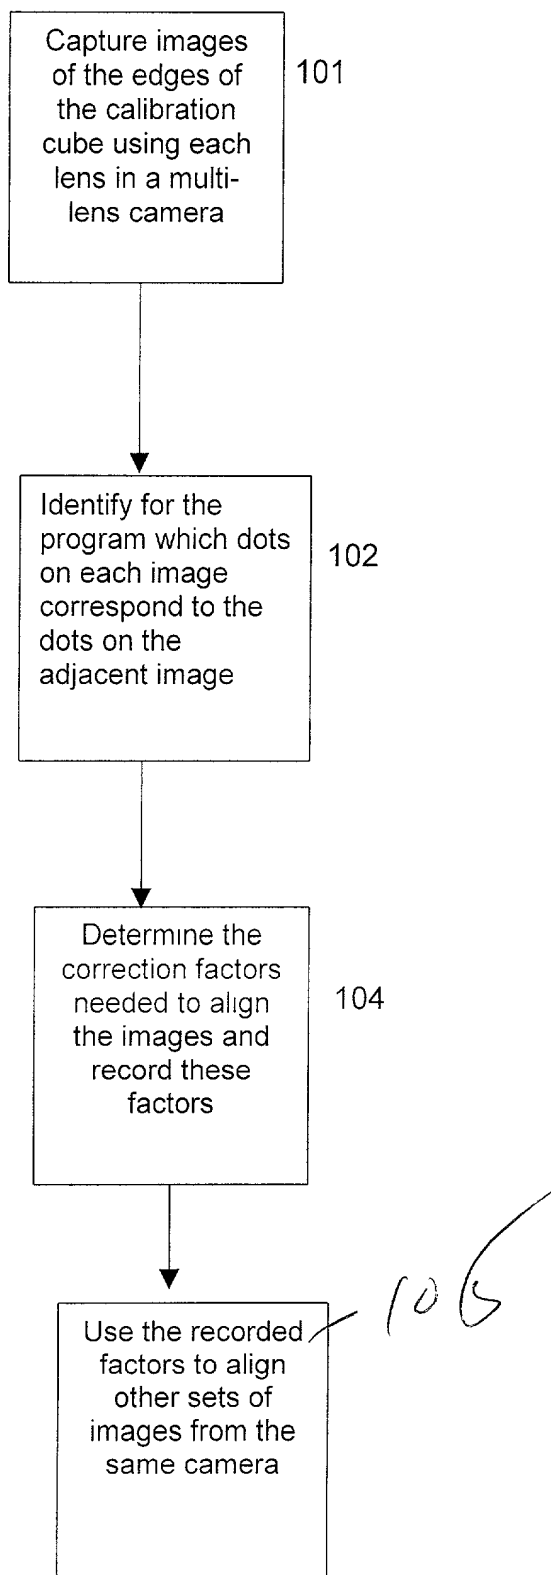


Figure 2A

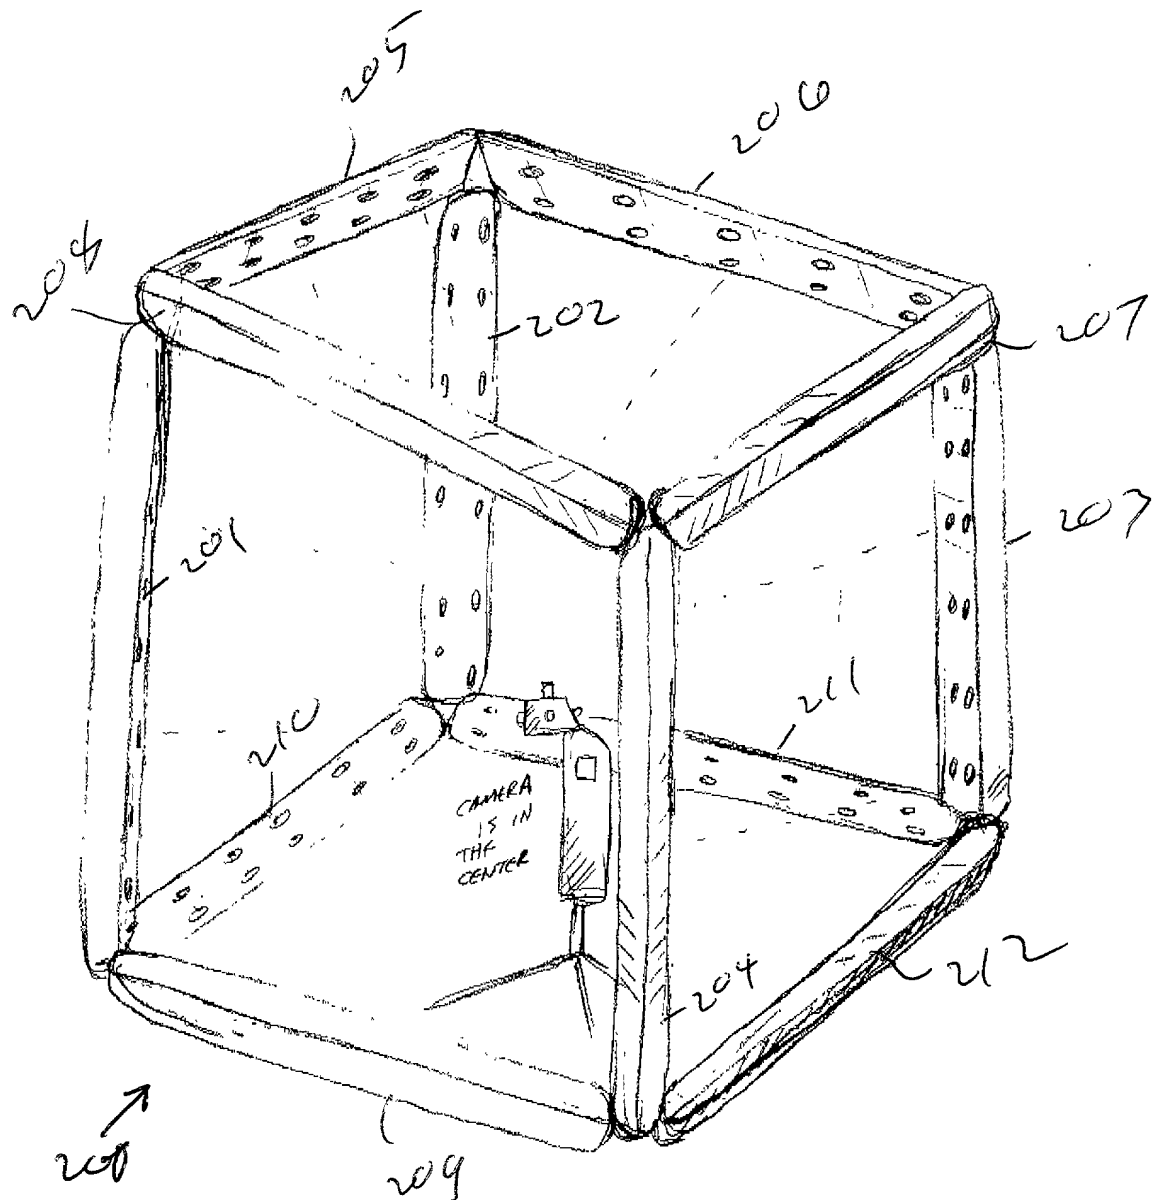

07/19/2000 13:33 410-602-1161

NINE FORTY EIGHT

PAGE 04

Figure 2B

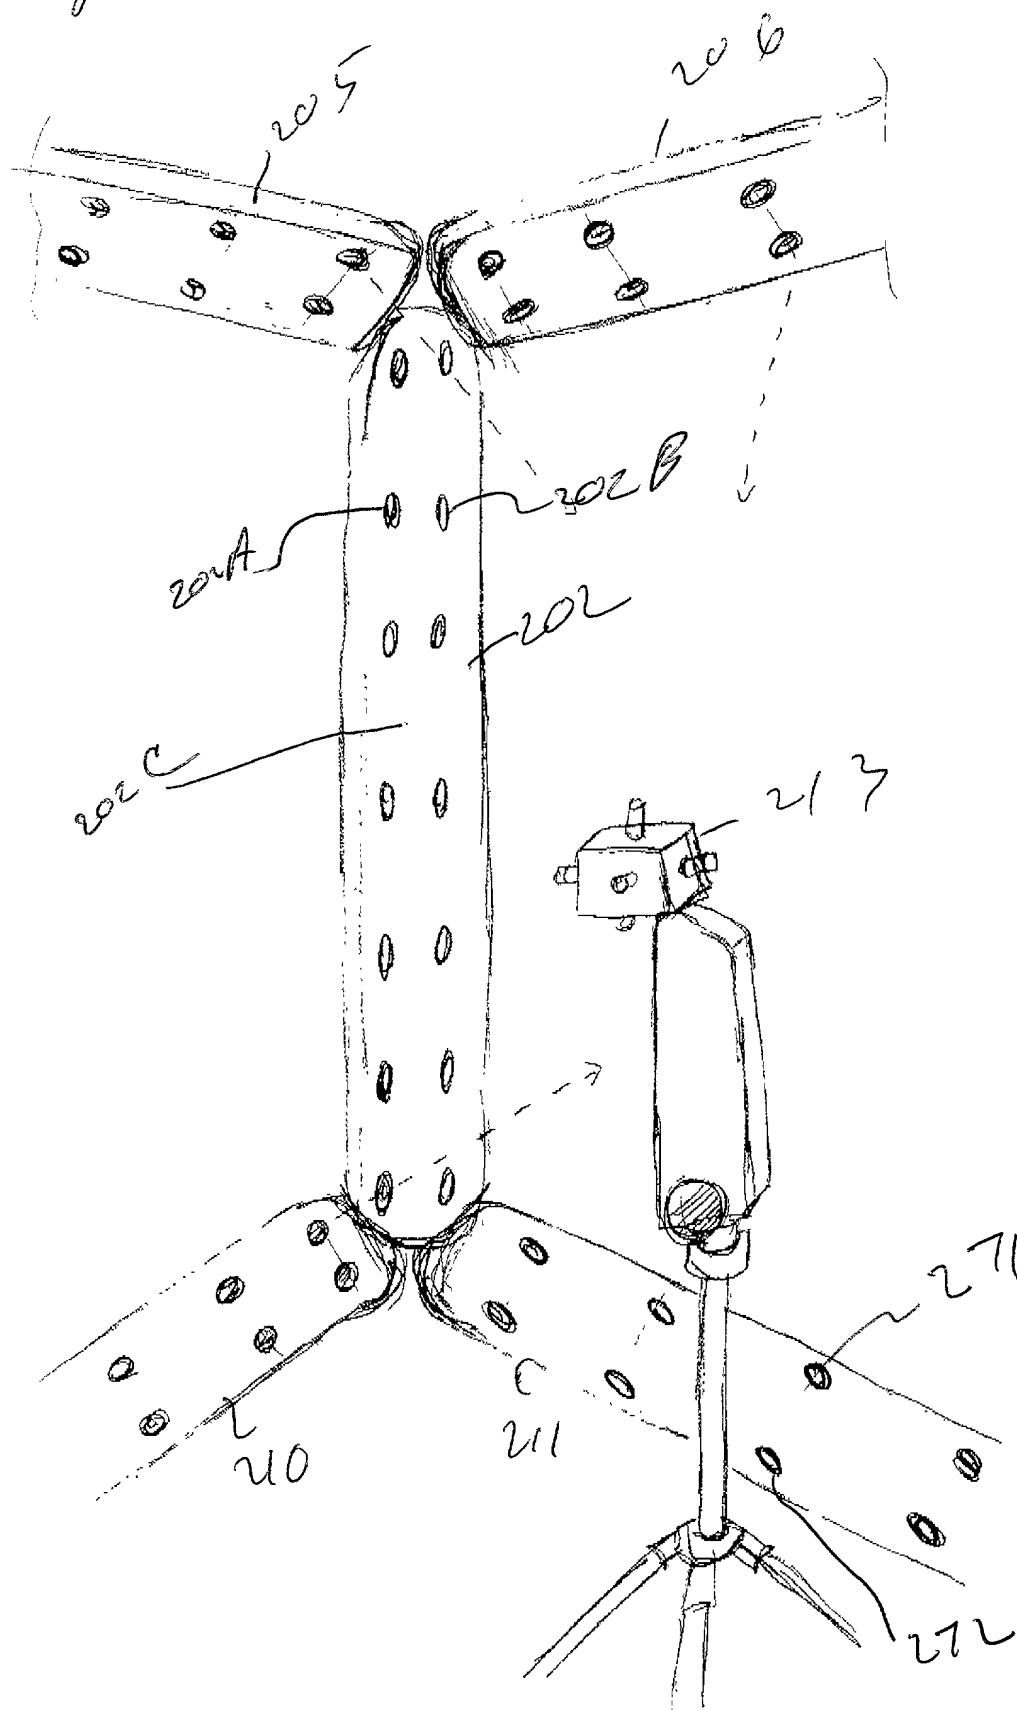


Figure ~~20~~ 2C





Figure ~~2~~ 3 A


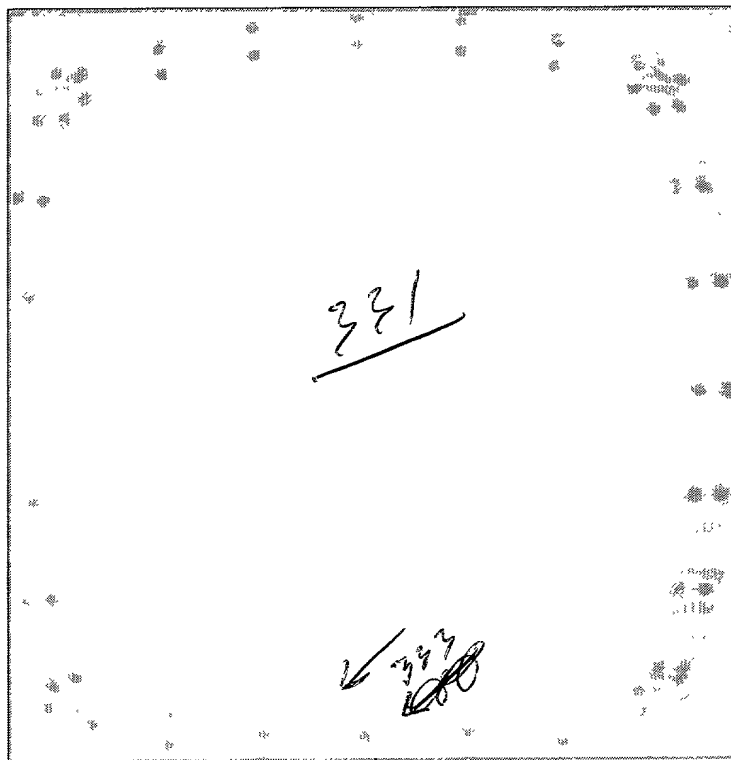




Figure 3B

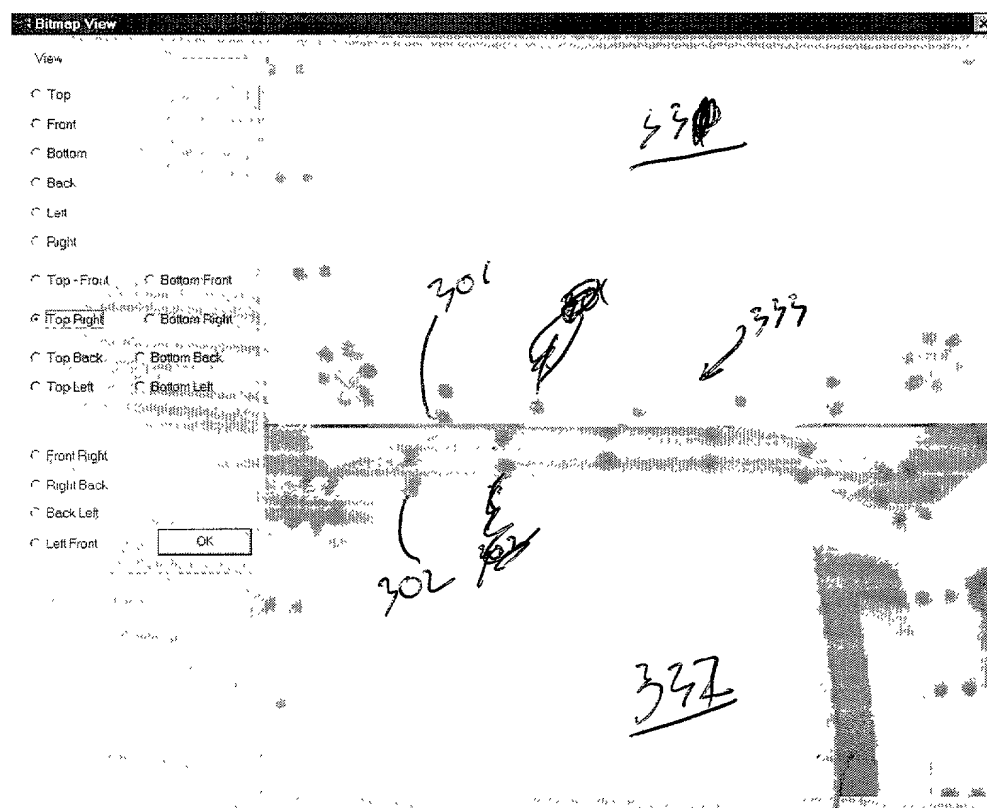

Blair-Bush  
Laurie G. Bush

2002

Figure ~~EA~~ 3C

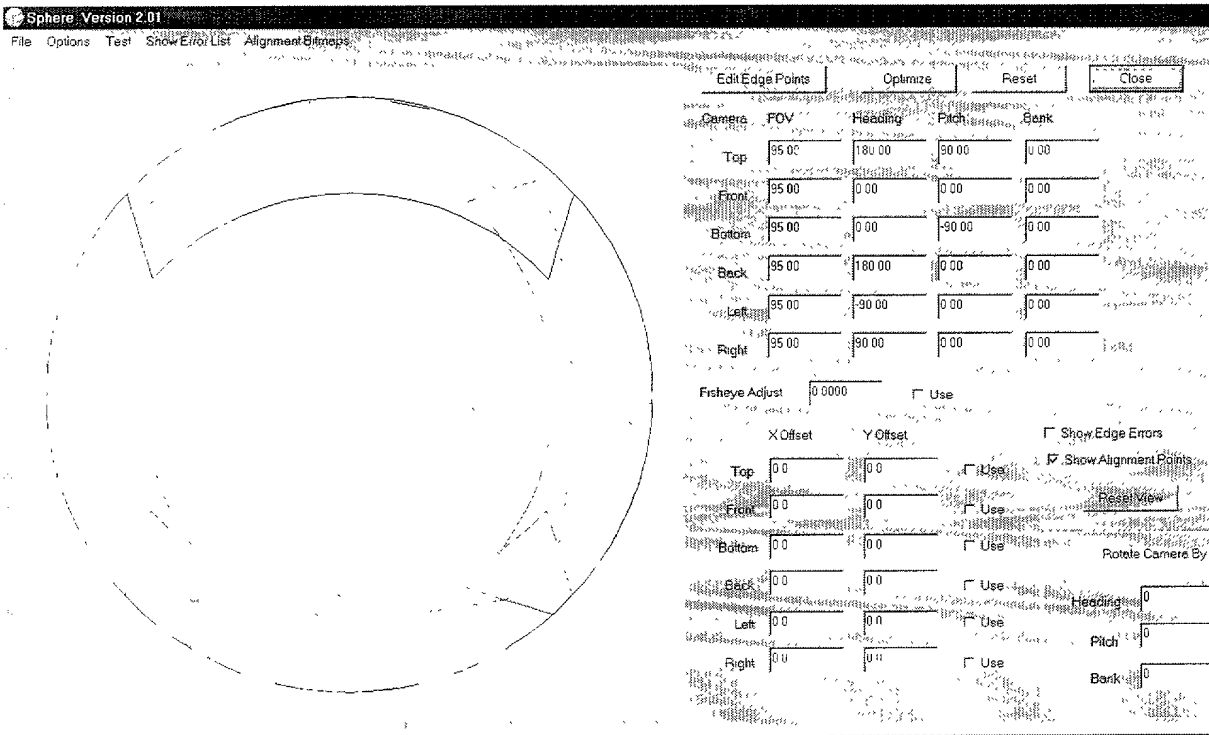


Figure 3B 2 4



Sphere Version 2.01

File Options Test Show Error List Alignment Brmaps

Edit Edge Points

Camera FOV

Top 95.00

Front 95.00

Bottom 95.00

Back 95.00

Left 95.00

Right 95.00

Fisheye Adjust 0.000

X Offset

Top 0.0



Front 0.0

Bottom 0.0

Back 0.0

Left 0.0

Right 0.0

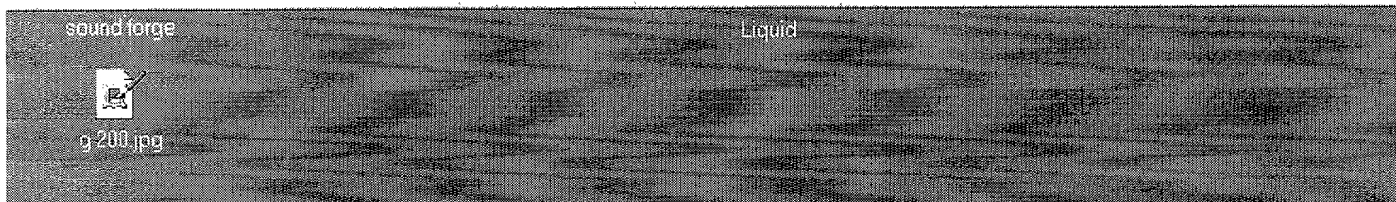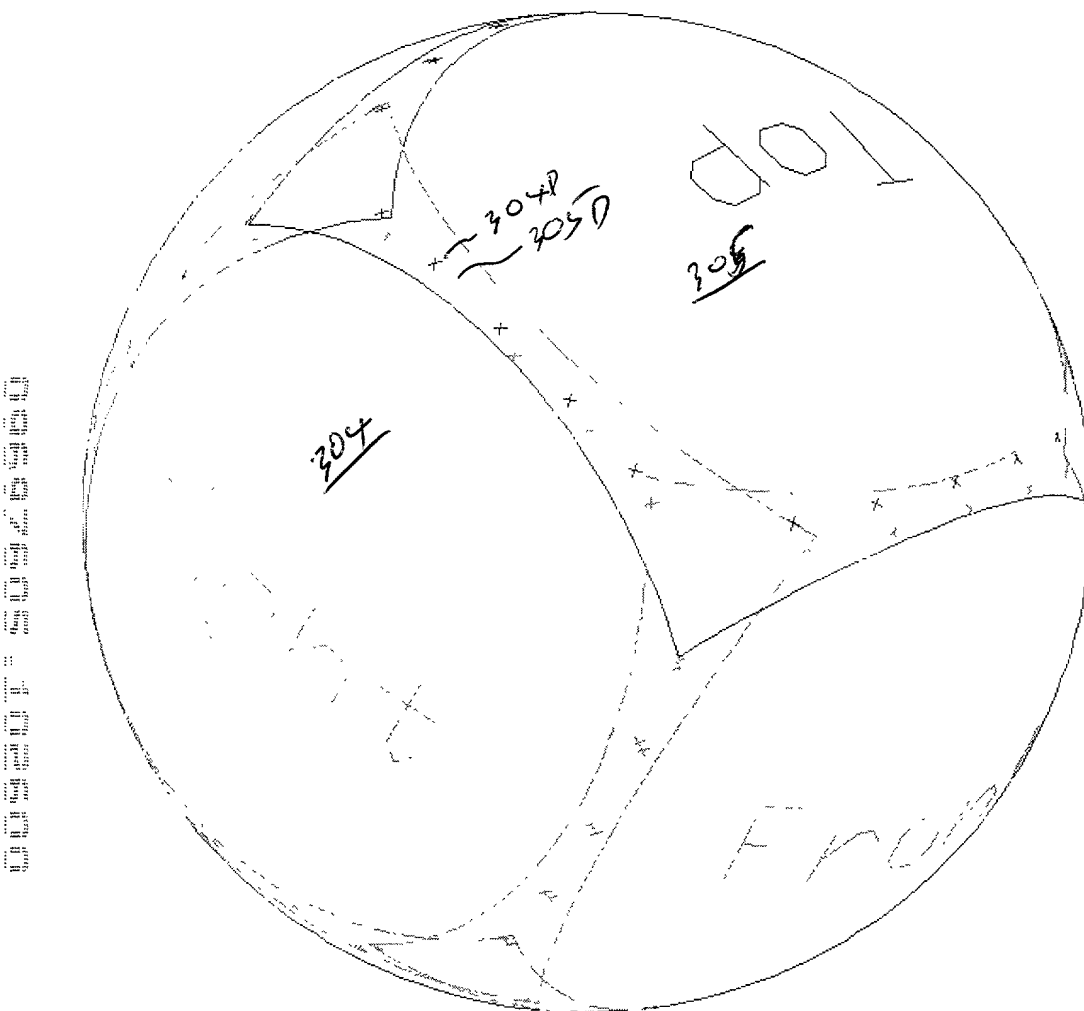

Start Hacked Astro Seam... Calibration Cube Adobe Photoshop Sphere Version 2.01

Fig 4A

5

[REDACTED]

[REDACTED]

[REDACTED]

Figure 6


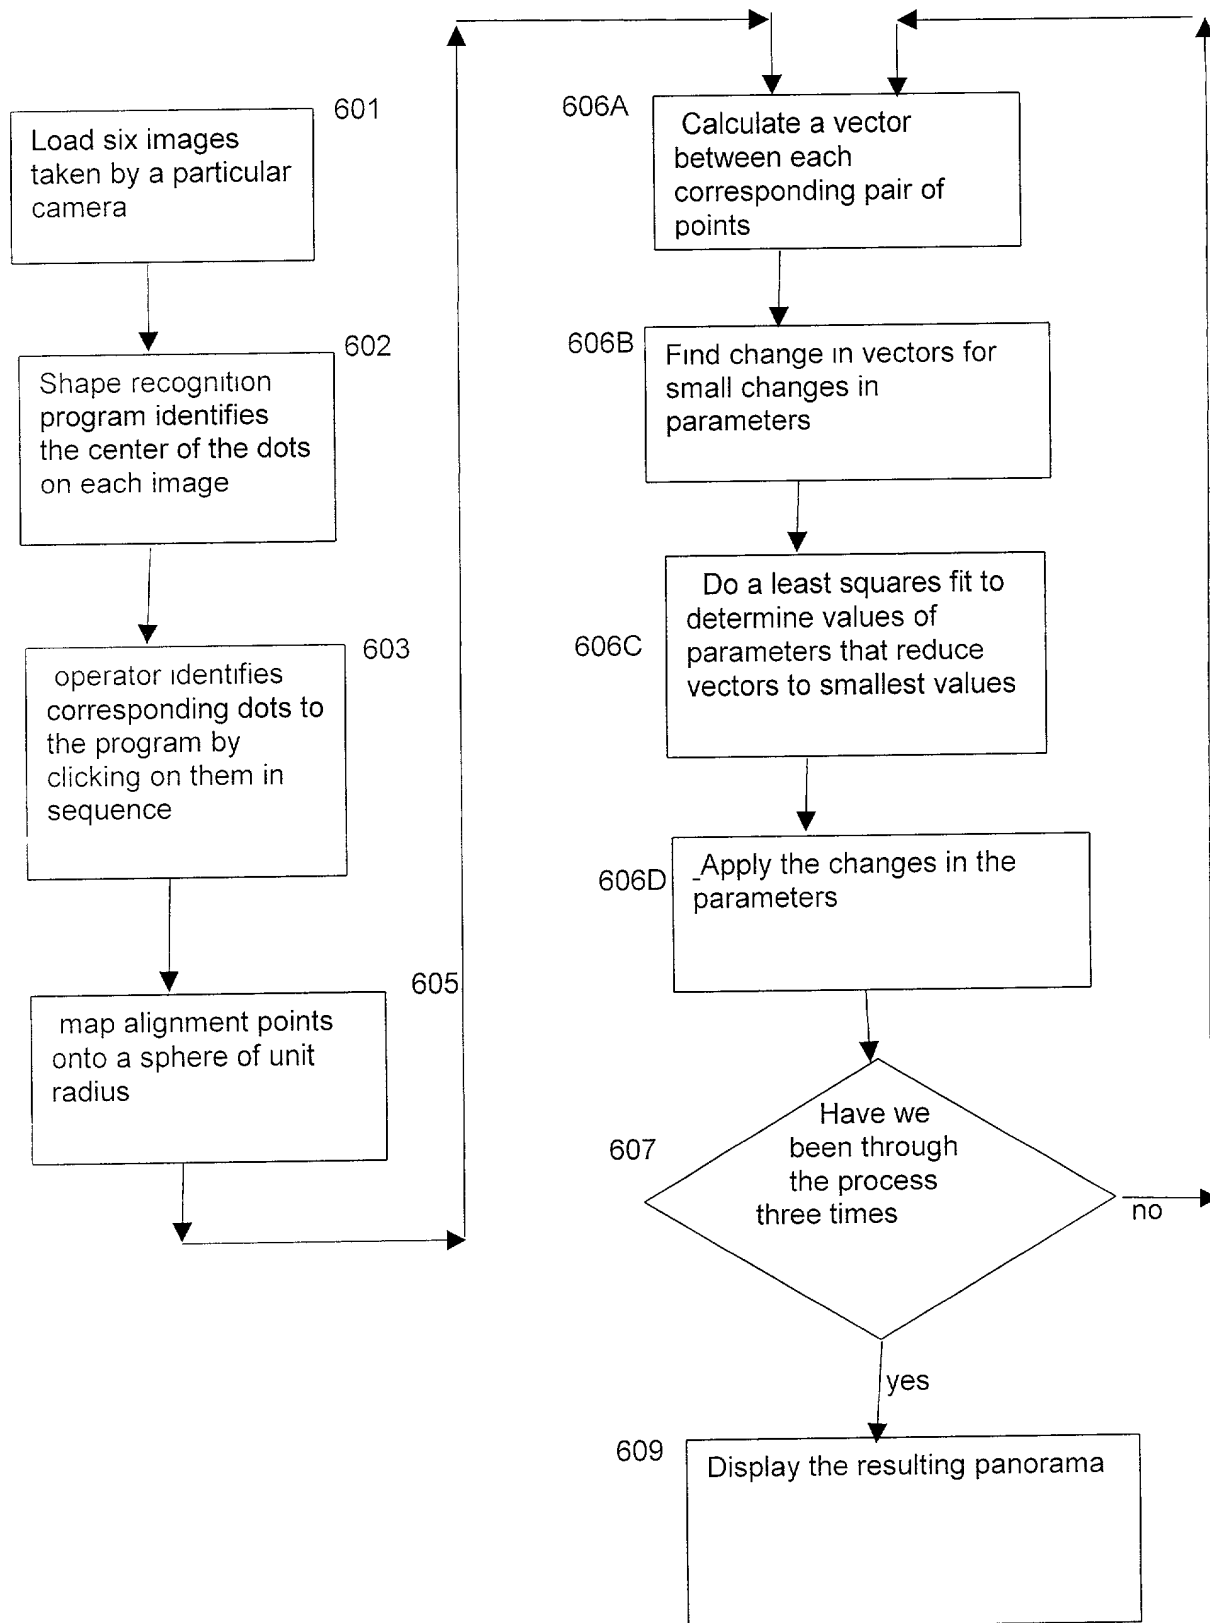


Figure 7

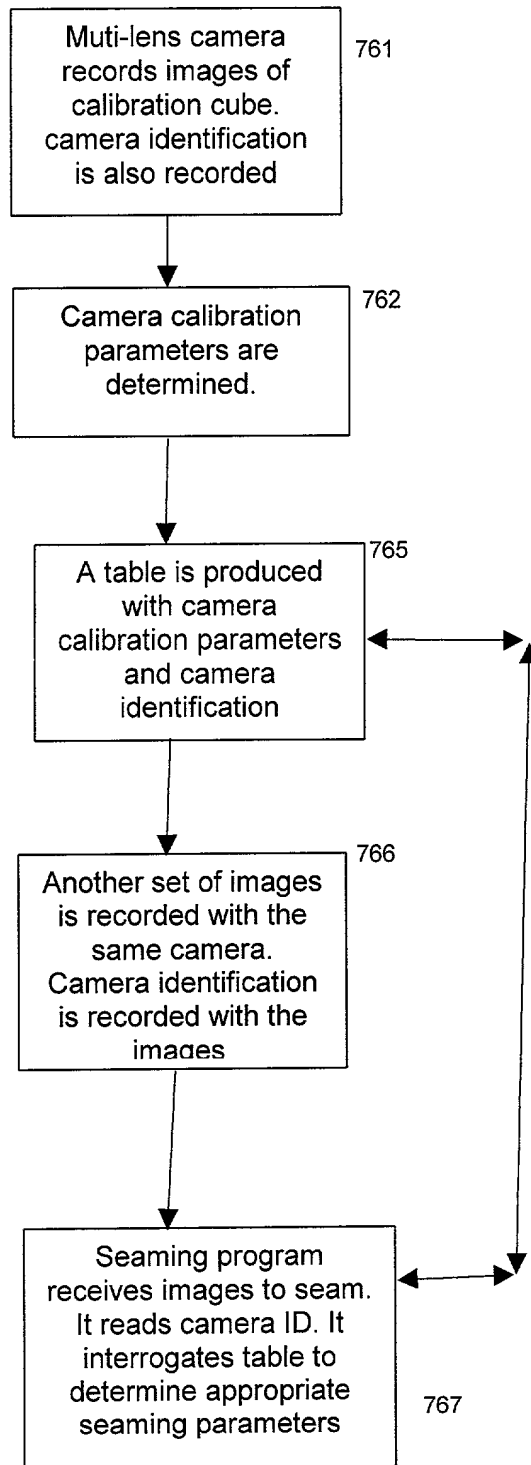

# DECLARATION BY INVENTORS

Each of the below named inventors, hereby declares that:

My residence, post office address and citizenship are as stated below next to my name,

I believe that I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention,

**Entitled:** SYSTEM AND METHOD FOR CAMERA CALIBRATION

**Docket Number:** EWG-123 US,  
the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specifications, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations 1.56(a).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made, with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

CLAIM OF PRIORITY BASED ON FOREIGN APPLICATIONS: NONE

CLAIM OF PRIORITY BASED ON PREVIOUSLY FILED U.S. APPLICATIONS: NONE

**Michael C. Park**

**USA**

*Michael C. Park*

*10-24-00*

Inventor name

Citizenship

Signature

Date

**700 SW Vermont Ct. #102, Portland, OR 97223**

Post Office Address and Residence

**Scott Wilson**

**USA**

*Scott Wilson*

*10-24-00*

Inventor name

Citizenship

Signature

Date

**11060 SW Tonguin Rd., sherwood, OR 97140**

Post Office Address and Residence

## POWER OF ATTORNEY

Commissioner of Patents and Trademarks  
Washington, D. C. 20231

Sir:

**IMOVE INCORPORATED** is the assignee of the invention:

Entitled: **SYSTEM AND METHOD FOR CAMERA CALIBRATION**

Docket: **EWG-123 US**,

the specification of which is being filed herewith.

**IMOVE INCORPORATED**., as assignee, hereby appoints the following attorney to prosecute this application and to transact all business connected therewith in the U. S. Patent and Trademark Office.

<u>Name</u>	<u>Reg. No.</u>
Elmer W. Galbi	19,761

Send all correspondence to:

Elmer W. Galbi, Esq.  
13314 Vermeer Drive  
Lake Oswego, OR, 97035

Direct telephone calls to: Elmer W. Galbi 503-697-7844

Date: 10/23/00

  
G. David Ripley  
IMOVE INCORPORATED  
Chief Technology Officer